


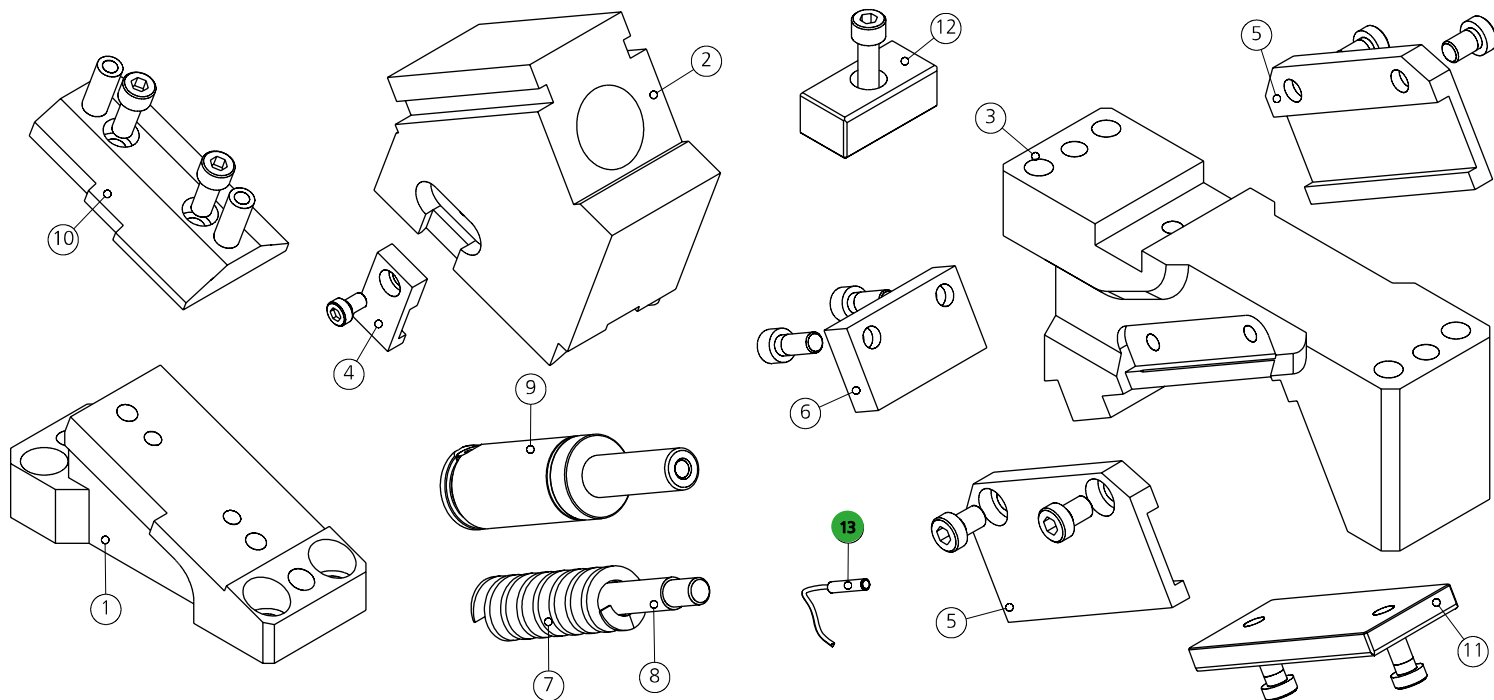


POS.	DESCRIPTION	Q.TY
001	CUNEO / WEDGE / DRUCKKEIL	1
002	SLITTA / SLIDER / LAGERKEIL	1
003	CORPO CAMMA / CAM BODY / GRUNDGEHÄUSE	1
004	STAFFA DI AGGANCIO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG	1
005	STAFFA / BRACKET / BRACKET	2
006	FINECORSO / LIMIT SWITCHES / ENDSCHALTER	1
007	MOLLA / COIL SPRING / FEDER	1*CHOOSE

POS.	DESCRIPTION	Q.TY
008	PERNO / PIN / STIFT	1*CHOOSE
009	CILINDRO AD AZOTO / NITROGEN CYLINDER / STICKSTOFFZYLINDER	1*CHOOSE
010**	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
011**	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
012	CHIAVETTA / KEY / SCHLÜSSEL	1
013	SENSORE DI SICUREZZA / SECURITY SENSOR / SENSOR FÜR SICHERHEIT	1*OPTION


** Le piastre di scorrimento 010 e 011 sono presenti nelle camme 0155.055*. Nelle camme 0155.052* il cuneo 001 e il corpo 003 sono integrali.

** Wear plates 010 and 011 are included in cam units 0155.055*. In cam units 0155.052* wedge 001 and cam body 003 are integral.

**In der Nocken 0155.055* sind die Gleitplatten 010 und 011 vorhanden. Der Druckkeil 001 und das Grundgehäuse 003 sind Einzelstück in den Nocken 0155.052*.



β	PRESS STROKE	SPRING STROKE	CAM STROKE	EXTRACTION FORCE (DAN)			CUTTING FORCE (DAN)	
				COIL SPRING	GAS SPRING 0155.052*	GAS SPRING 0155.055*	0155.052*	0155.055*
0°	34.5	45	28.9	278	393	668	2790	7890
5°	34.6	45	31.9	278	393	668	2790	7890
10°	35	45	35	277	393	667	2790	7890
15°	35.7	45	38.2	277	392	667	2790	7890
20°	36.7	45	41.5	277	392	667	2790	7890
25°	38	45	45	276	392	666	2790	7890
30°	39.8	45	48.8	276	391	666	2790	7890
35°	42.1	45	53.1	276	391	666	2790	7890
40°	45	45	57.9	275	391	665	2790	7890
45°	47.7	44	62	269	387	659	2790	7890
50°	47.7	40	62.2	247	375	637	2790	7890

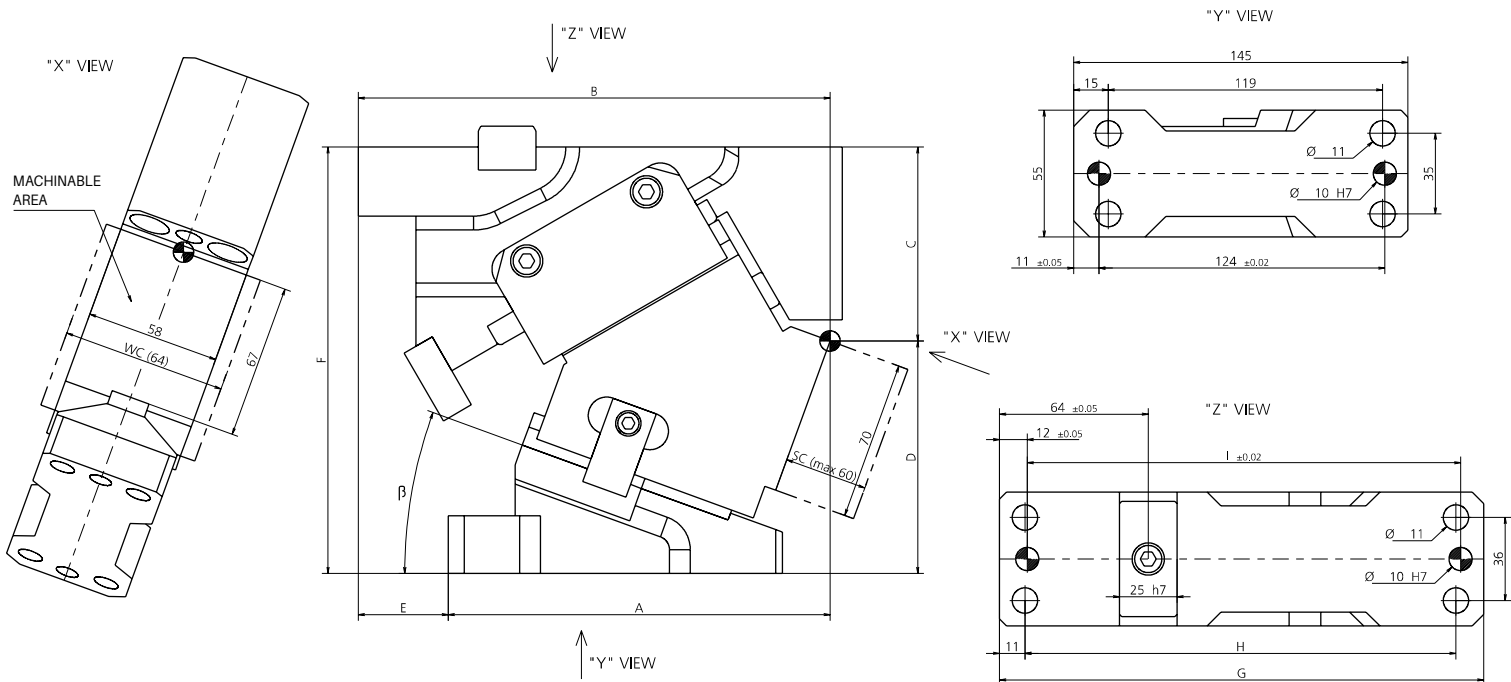

CODE	β	A	B	C	D	E	F	G	H	I
0155.05**00	0°	138	197	66	119	59	185	195	172	173
0155.05**05	5°	145.75	200.75	70.74	114.26	55	185	200	177	178
0155.05**10	10°	152.26	203.26	75.36	109.64	51	185	205	182	183
0155.05**15	15°	159.54	203.54	79.84	105.16	44	185	205	182	183
0155.05**20	20°	165.62	204.62	84.16	100.84	39	185	210	187	188
0155.05**25	25°	171.51	203.51	88.31	96.69	32	185	210	187	188
0155.05**30	30°	176.21	201.21	92.26	92.74	25	185	210	187	188
0155.05**35	35°	180.76	198.76	96	89	18	185	210	187	188
0155.05**40	40°	185.16	195.16	100.53	84.47	10	185	210	187	188
0155.05**45	45°	189.44	189.44	103.82	81.18	0	185	207	184	185
0155.05**50	50°	193.61	177.61	115.87	74.13	-16	190	202	179	180

CAM COD.	CUTTING FORCE	COIL/GAS SPRING	ANGLE	OPTIONAL SIZE SC	OPTIONAL SIZE WC
0155.05	2=2790 DAN	2= COIL SPRING	-00= ANGLE (FROM 0° TO 50°)	-SC** (FROM 0MM TO 60MM)	WC64 (WIDTH EXTENDED 64MM)
		4= GAS SPRING			
	5=7890 DAN	6= GAS SPRING NOT FILLED			
		8= WITHOUT COIL/GAS SPRING			

13 PATENT PENDING

13 (9003) SENSORE / SENSOR / SENSOR



ESEMPIO / EXAMPLES/ BEISPIELE / EXEMPLES

0155.0524-20 = CAM UNIT **0155.05**, CUTTING FORCE 2790 DAN (**2**), GAS SPRING (**4**), ANGLE **20°**

0155.0558-35-SC25-WC64 = CAM UNIT **0155.05**, CUTTING FORCE 7890 DAN (**5**), WITHOUT COIL/GAS SPRING (**8**), ANGLE **35°**, OPTIONAL SIZE 25MM (**SC25**), WIDTH EXTENDED 64MM (**WC64**)