



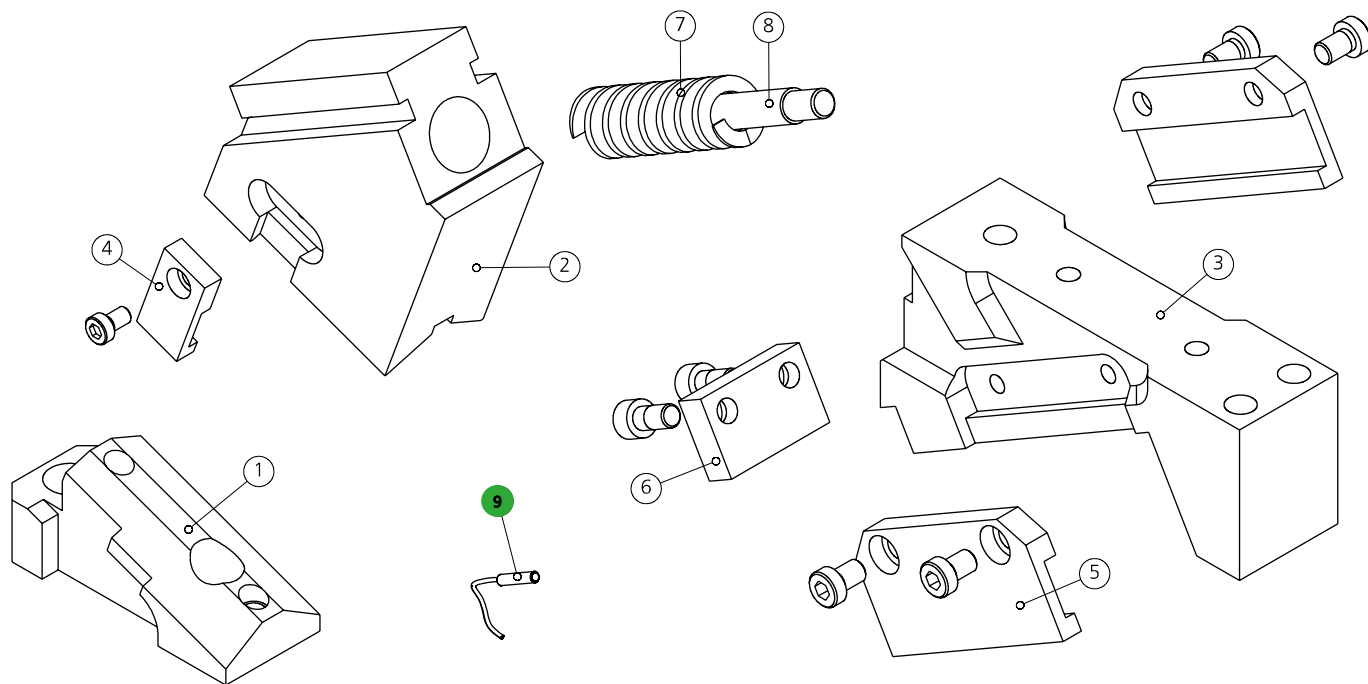


POS.	DESCRIPTION	Q.TY
001	CUNEO / WEDGE / DRUCKKEIL	1
002	SLITTA / SLIDER / LAGERKEIL	1
003	CORPO CAMMA / CAM BODY / GRUNDGEHÄUSE	1
004	STAFFA DI AGGANCIO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG	1
005	STAFFA / BRACKET / BRACKET	2

POS.	DESCRIPTION	Q.TY
006	FINECORSO / LIMIT SWITCHES / ENDSCHALTER	1
007	MOLLA / SPRING / FEDER	1
008	PERNO / PIN / STIFT	1
009	SENSORE DI SICUREZZA / SECURITY SENSOR / SENSOR FÜR SICHERHEIT	1*OPTION



β	PRESS STROKE	SPRING STROKE	CAM STROKE	EXTRACTION FORCE (DAN)	CUTTING FORCE (DAN)
0°	34.5	45	28.9	152	2210
5°	33.1	43	30.5	152	2210
10°	31.1	40	31.1	151	2210
15°	30.1	38	32.2	143	2210
20°	30.2	37	34.1	143	2210
25°	30.4	36	36	142	2210
30°	31	35	38	142	2210
35°	31.8	34	40.1	142	2210
40°	33	33	42.4	142	2210
45°	35.8	33	46.5	142	2210
50°	38.1	32	49.8	141	2210

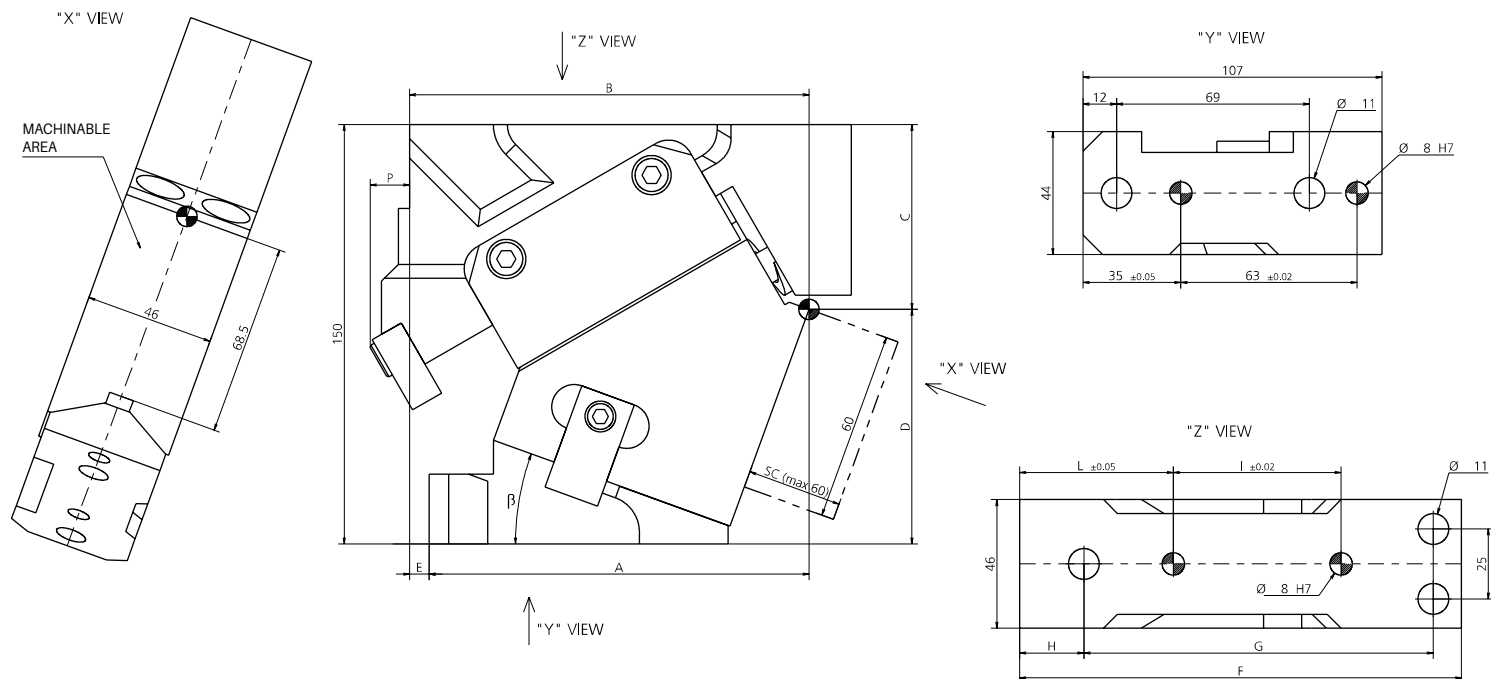

CODE	β	A	B	C	D	E	F	G	H	I	L	P
0155.0412-00	0°	112	138	53	97	26	153	130	13	60	45	10.4
0155.0412-05	5°	118.89	140.89	56.44	93.56	22	157	130	17	60	49	11.8
0155.0412-10	10°	124.66	142.66	59.77	90.23	18	160	130	20	60	52	12.2
0155.0412-15	15°	130.31	143.31	62.99	87.01	13	157	125	22	60	54	13
0155.0412-20	20°	135.87	142.87	66.09	83.91	7	158	125	23	60	55	14.4
0155.0412-25	25°	142.34	142.34	69.06	80.94	0	158	125	23	60	58	14.5
0155.0412-30	30°	147.72	140.72	71.89	78.11	-7	158	125	23	60	58	14.5
0155.0412-35	35°	151.04	147.04	74.58	75.42	-4	165	125	30	60	68	5.3
0155.0412-40	40°	156.31	145.31	78.12	71.88	-11	165	125	30	60	71	3
0155.0412-45	45°	160.54	137.54	81.51	68.49	-23	160	120	30	55	71	6.5
0155.0412-50	50°	163.73	133.73	88.74	61.26	-30	160	120	30	55	71	4

9 PATENT PENDING

9 (9003) SENSORE / SENSOR / SENSOR



MODELLO D'ORDINE / ORDER EXAMPLE / BESTELLBEISPIEL / MODÈLE DE COMMANDE

MODEL **0155.0412** INCLINATION **-20°** OPTION **SC30 (Max 60mm)** OPTION CODE **9003.0002**