


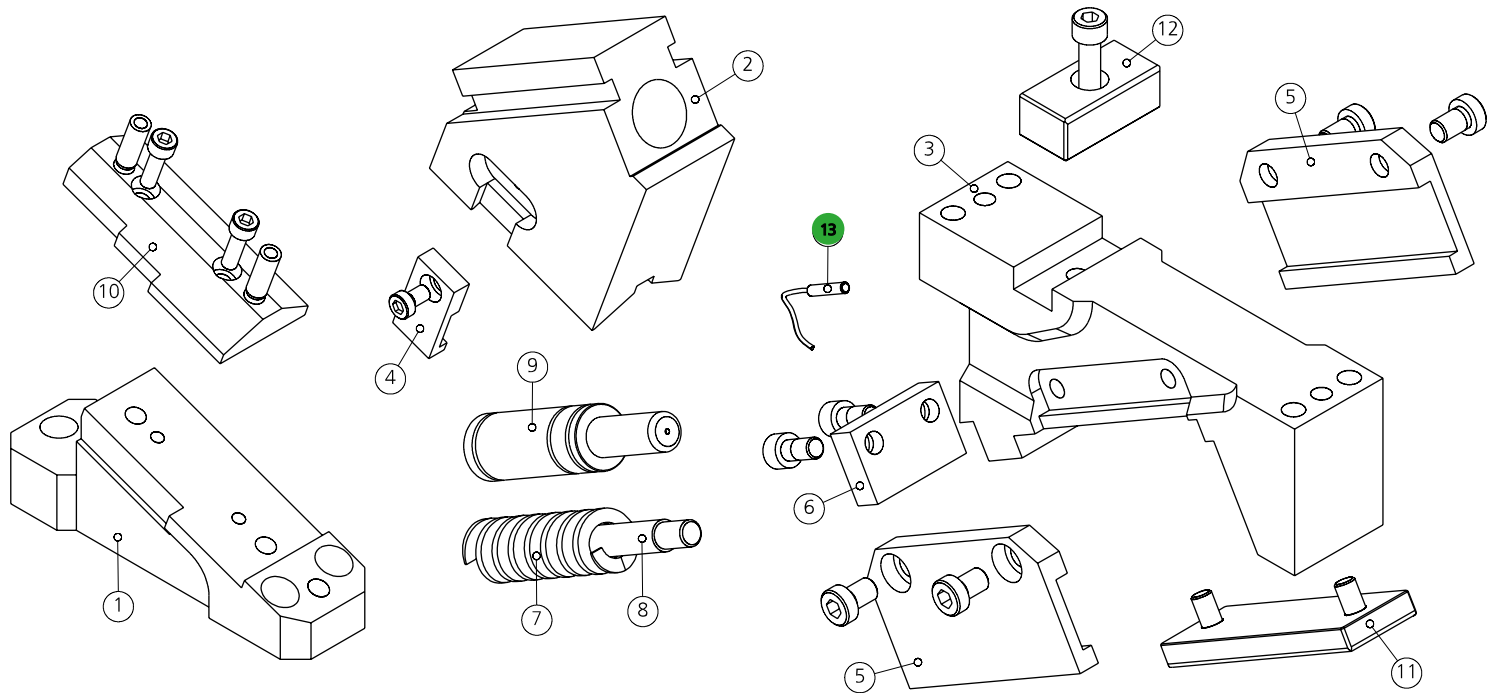


POS.	DESCRIPTION	Q.TY
001	CUNEO / WEDGE / DRUCKKEIL	1
002	SLITTA / SLIDER / LAGERKEIL	1
003	CORPO CAMMA / CAM BODY / GRUNDGEHÄUSE	1
004	STAFFA DI AGGANCIO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG	1
005	STAFFA / BRACKET / BRACKET	2
006	FINECORSO / LIMIT SWITCHES / ENDSCHALTER	1
007	MOLLA / COIL SPRING / FEDER	1*CHOOSE

POS.	DESCRIPTION	Q.TY
008	PERNO / PIN / STIFT	1*CHOOSE
009	CILINDRO AD AZOTO / NITROGEN CYLINDER / STICKSTOFFZYLINDER	1*CHOOSE
010**	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
011**	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
012	CHIAVETTA / KEY / SCHLÜSSEL	1
013	SENSORE DI SICUREZZA / SECURITY SENSOR / SENSOR FÜR SICHERHEIT	1*OPTION


** Le piastre di scorrimento 010 e 011 sono presenti nelle camme 0155.045*. Nelle camme 0155.042* il cuneo 001 e il corpo 003 sono integrali.

** Wear plates 010 and 011 are included in cam units 0155.045*. In cam units 0155.042* wedge 001 and cam body 003 are integral.

**In der Nocken 0155.045* sind die Gleitplatten 010 und 011 vorhanden. Der Druckkeil 001 und das Grundhäuse 003 sind Einzelstück in den Nocken 0155.042*.



β	PRESS STROKE	SPRING STROKE	CAM STROKE	EXTRACTION FORCE (DAN)		CUTTING FORCE (DAN)	
				COIL SPRING	GAS SPRING	0155.042*	0155.045*
0°	34.5	45	28.9	152	392	2210	5640
5°	34.6	45	31.9	152	392	2210	5640
10°	35	45	35	152	392	2210	5640
15°	35.7	45	38.2	152	392	2210	5640
20°	36.7	45	41.5	151	391	2210	5640
25°	38	45	45	151	391	2210	5640
30°	39.8	45	48.8	151	391	2210	5640
35°	42.1	45	53.1	151	391	2210	5640
40°	45	45	57.9	150	390	2210	5640
45°	47.7	44	62	147	387	2210	5640
50°	47.7	40	62.2	135	375	2210	5640

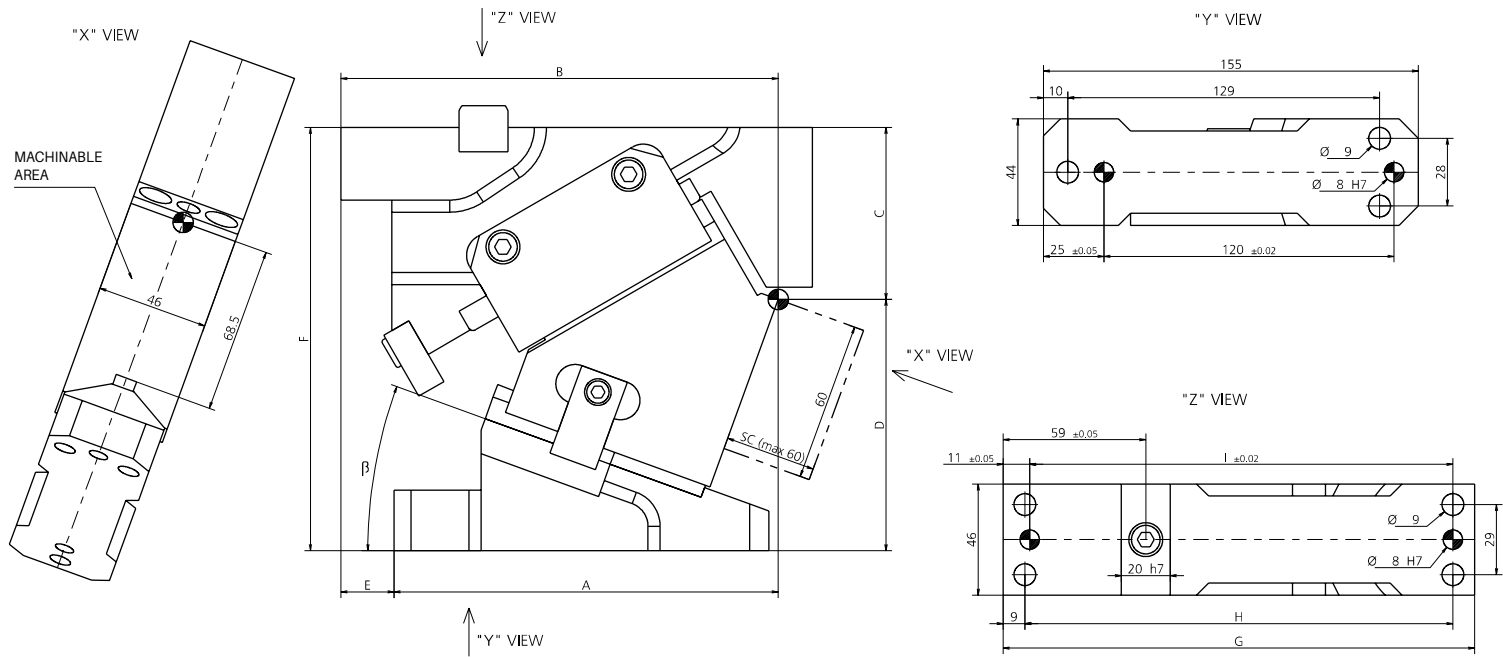

CODE	β	A	B	C	D	E	F	G	H	I
0155.04**-00	0°	132	170	57	118	38	175	180	162	160
0155.04**-05	5°	138.89	173.89	60.44	114.56	35	175	185	167	165
0155.04**-10	10°	145.66	177.66	64.77	110.23	32	175	190	172	170
0155.04**-15	15°	152.31	180.31	67.99	107.01	28	175	195	177	175
0155.04**-20	20°	158.87	180.87	71.09	103.91	22	175	195	177	175
0155.04**-25	25°	164.34	180.34	74.06	100.94	16	175	195	177	175
0155.04**-30	30°	170.72	180.72	76.89	98.11	10	175	197	179	177
0155.04**-35	35°	176.04	179.04	79.58	95.42	3	175	197	179	177
0155.04**-40	40°	185.31	176.31	83.12	91.88	-9	175	197	179	177
0155.04**-45	45°	190.54	172.54	85.51	89.49	-18	175	195	177	175
0155.04**-50	50°	194.73	161.73	93.74	86.26	-33	180	190	172	170

CAM COD.	CUTTING FORCE	COIL/GAS SPRING	ANGLE	OPTIONAL SIZE SC
0155.04	2=2210 DAN	2= COIL SPRING	-00= ANGLE (FROM 0° TO 50°)	-SC** (FROM 0MM TO 60MM)
		4= GAS SPRING		
	5=5640 DAN	6= GAS SPRING NOT FILLED		
		8= WITHOUT COIL/GAS SPRING		

13 PATENT PENDING

13 (9003) SENSORE / SENSOR / SENSOR



ESEMPIO / EXAMPLES/ BEISPIELE / EXEMPLES

0155.0424-20 = CAM UNIT **0155.04**, CUTTING FORCE 2210 DAN (**2**), GAS SPRING (**4**), ANGLE **20°**

0155.0458-35-SC25 = CAM UNIT **0155.04**, CUTTING FORCE 5640 DAN (**5**), WITHOUT COIL/GAS SPRING (**8**), ANGLE **35°**, OPTIONAL SIZE 25MM (**SC25**)