



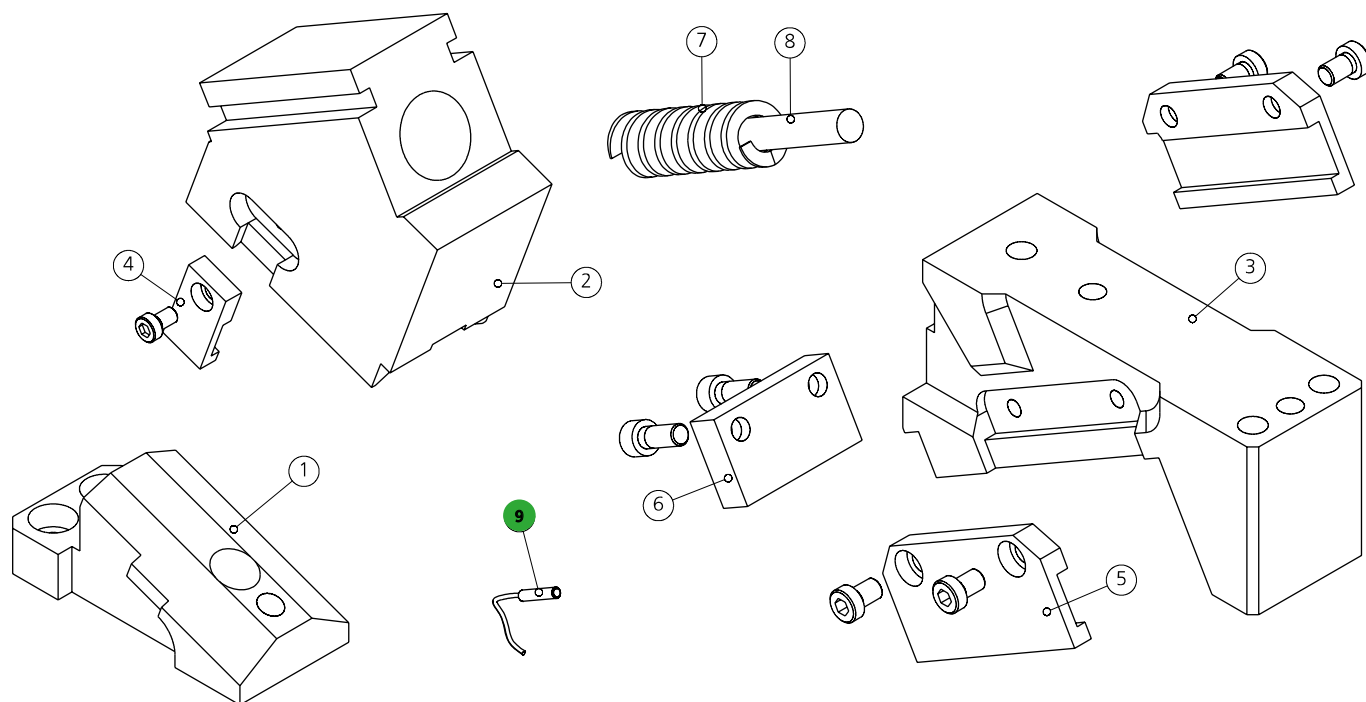


POS.	DESCRIPTION	Q.TY
001	CUNEO / WEDGE / DRUCKKEIL	1
002	SLITTA / SLIDER / LAGERKEIL	1
003	CORPO CAMMA / CAM BODY / GRUNDGEHÄUSE	1
004	STAFFA DI AGGANCIO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG	1
005	STAFFA / BRACKET / BRACKET	2

POS.	DESCRIPTION	Q.TY
006	FINECORSO / LIMIT SWITCHES / ENDSCHALTER	1
007	MOLLA / SPRING / FEDER	1
008	PERNO / PIN / STIFT	1
009	SENSORE DI SICUREZZA / SECURITY SENSOR / SENSOR FÜR SICHERHEIT	1*OPTION



β	PRESS STROKE	SPRING STROKE	CAM STROKE	EXTRACTION FORCE (DAN)	CUTTING FORCE (DAN)
0°	34.5	45	28.9	279	2790
5°	33.1	43	30.5	279	2790
10°	31.1	40	31.1	279	2790
15°	30.1	38	32.2	262	2790
20°	30.2	37	34.1	262	2790
25°	30.4	36	36	261	2790
30°	31	35	38	261	2790
35°	31.8	34	40.1	261	2790
40°	33	33	42.4	260	2790
45°	35.8	33	46.5	260	2790
50°	38.1	32	49.8	260	2790

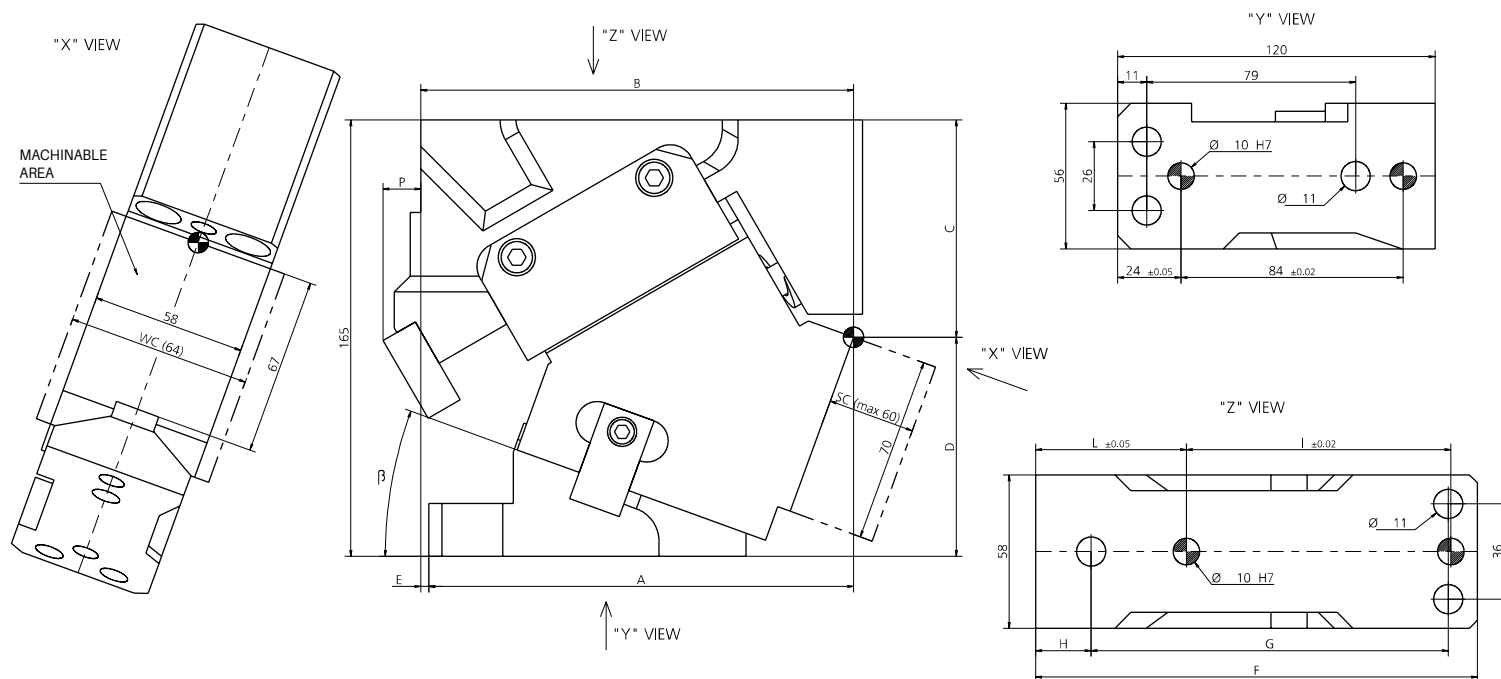

CODE	β	A	B	C	D	E	F	G	H	I	L	P
0155.0512-00	0°	135	162	64	101	27	164	140	13	107	47	10
0155.0512-05	5°	141.75	163.75	68.74	96.26	22	168	140	17	107	51	12
0155.0512-10	10°	148.26	165.26	73.36	91.64	17	169	140	18	107	52	12
0155.0512-15	15°	154.54	163.54	77.84	87.16	9	166	135	20	100	56	14.3
0155.0512-20	20°	160.62	163.62	82.16	82.84	3	167	135	21	100	57	14.2
0155.0512-25	25°	165.51	161.51	86.31	78.69	-4	167	130	26	95	62	14.8
0155.0512-30	30°	170.21	159.21	90.26	74.74	-11	167	130	26	95	62	14.2
0155.0512-35	35°	173.76	164.76	94	71	-9	175	130	34	95	70	4.4
0155.0512-40	40°	178.16	158.16	98.53	66.47	-20	167	125	31	85	72	5.4
0155.0512-45	45°	182.44	152.44	103.82	61.18	-30	167	125	31	85	72	5.3
0155.0512-50	50°	185.61	143.61	109.87	55.13	-42	163	125	27	80	73	6

9 PATENT PENDING

9 (9003) SENSORE / SENSOR / SENSOR



MODELLO D'ORDINE / ORDER EXAMPLE / BESTELLBEISPIEL / MODÈLE DE COMMANDE

MODEL **0155.0512** INCLINATION **-20°** OPTION **SC30 (Max 60mm)** OPTION CODE **9003.0002**