



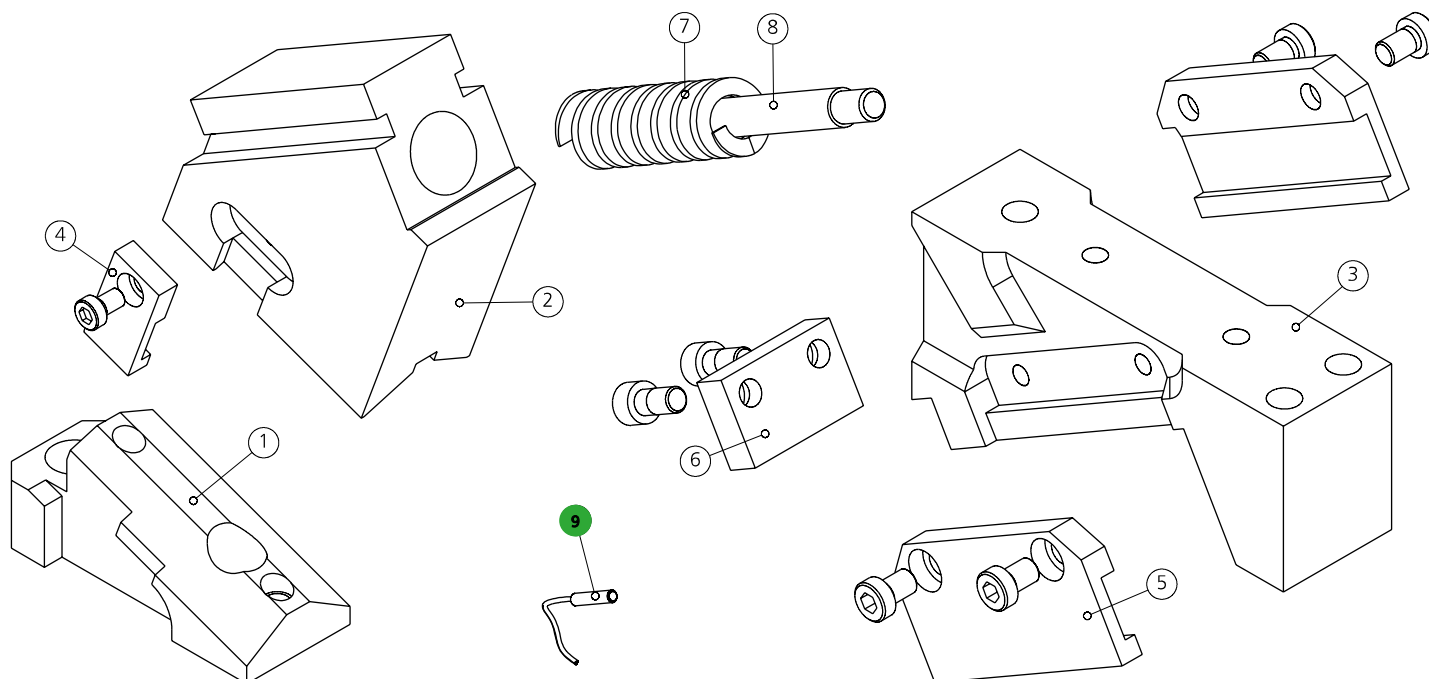


POS.	DESCRIPTION	Q.TY
001	CUNEO / WEDGE / DRUCKKEIL	1
002	SLITTA / SLIDER / LAGERKEIL	1
003	CORPO CAMMA / CAM BODY / GRUNDGEHÄUSE	1
004	STAFFA DI AGGANCIO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG	1
005	STAFFA / BRACKET / BRACKET	2

POS.	DESCRIPTION	Q.TY
006	FINECORSO / LIMIT SWITCHES / ENDSCHALTER	1
007	MOLLA / SPRING / FEDER	1
008	PERNO / PIN / STIFT	1
009	SENSORE DI SICUREZZA / SECURITY SENSOR / SENSOR FÜR SICHERHEIT	1*OPTION



β	α	PRESS STROKE	GAS SPRING STROKE	CAM STROKE	EXTRACTION FORCE (daN)	CUTTING FORCE (daN)
0°	50°	24.5	32	20.6	150	2210
5°	50°	22.3	29	20.6	150	2210
10°	50°	21	27	21	150	2210
15°	50°	19.8	25	21.2	134	2210
20°	50°	19.6	24	22.1	134	2210
25°	50°	19.4	23	23	134	2210
30°	50°	20.3	23	25	133	2210
35°	50°	21.5	23	27.1	133	2210
40°	50°	23	23	29.6	133	2210
45°	50°	24.9	23	32.4	133	2210
50°	50°	27.4	23	35.8	132	2210
55°	55°	37.1	26	45.3	148	2210
60°	60°	39.8	23	46	159	2210
65°	65°	42.9	20	47.3	180	2210
70°	70°	46.7	17	49.7	206	2210
75°	75°	48.5	13	50.2	247	2210
80°	80°	56.7	10	57.6	303	2210

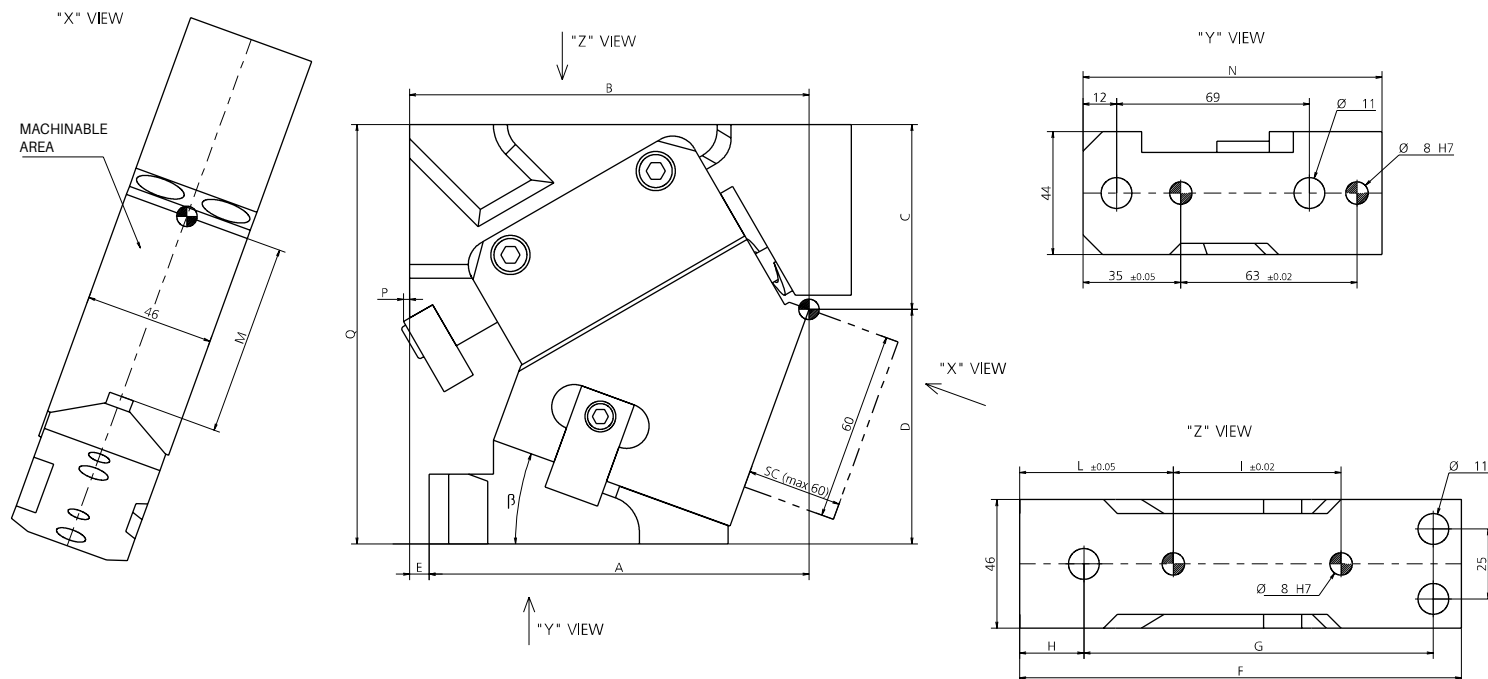

CODE	β	A	B	C	D	E	F	G	H	I	L	M	N	P	Q
0155.0411-00	0°	112	138	53	97	26	153	130	13	60	45	68.5	107	2	150
0155.0411-05	5°	118.89	140.89	56.44	93.56	22	157	130	17	60	49	68.5	107	1.9	150
0155.0411-10	10°	124.66	142.66	59.77	90.23	18	160	130	20	60	52	68.5	107	2.2	150
0155.0411-15	15°	130.31	143.31	62.99	87.01	13	157	125	22	60	54	68.5	107	2.3	150
0155.0411-20	20°	135.87	142.87	66.09	83.91	7	158	125	23	60	55	68.5	107	3.1	150
0155.0411-25	25°	142.34	142.34	69.06	80.94	0	158	125	23	60	58	68.5	107	2.8	150
0155.0411-30	30°	147.72	140.72	71.89	78.11	-7	158	125	23	60	58	68.5	107	3.2	150
0155.0411-35	35°	151.04	137.04	74.58	75.42	-14	155	125	20	60	58	68.5	107	4.7	150
0155.0411-40	40°	156.31	135.31	78.12	71.88	-21	155	125	20	60	61	68.5	107	3.1	150
0155.0411-45	45°	160.54	127.54	81.51	68.49	-33	150	120	20	55	61	68.5	107	6.6	150
0155.0411-50	50°	163.73	123.73	88.74	61.26	-40	150	120	20	55	61	68.5	107	5	150
0155.0411-55	55°	181.23	138.23	97.82	62.18	-43	160	120	30	55	71	83.5	107	4	160
0155.0411-60	60°	182.78	134.78	106.81	58.19	-48	160	120	30	55	71	75	107	4	165
0155.0411-65	65°	209.23	132.23	108.72	61.28	-77	160	120	30	55	71	75	123	4	170
0155.0411-70	70°	212.36	129.36	110.46	59.54	-83	160	120	30	55	71	75	120	4	170
0155.0411-75	75°	221.38	128.38	112.45	57.55	-93	160	120	30	55	71	75	120	4	170
0155.0411-80	80°	231.82	127.82	113.42	56.58	-104	160	120	30	55	71	80	120	4	170

9 PATENT PENDING

9 (9003) SENSORE / SENSOR / SENSOR



MODELLO D'ORDINE / ORDER EXAMPLE / BESTELLBEISPIEL / MODÈLE DE COMMANDE

MODEL **0155.0411** INCLINATION **-20°** OPTION **SC30 (Max 60mm)** OPTION CODE **9003.0002**