


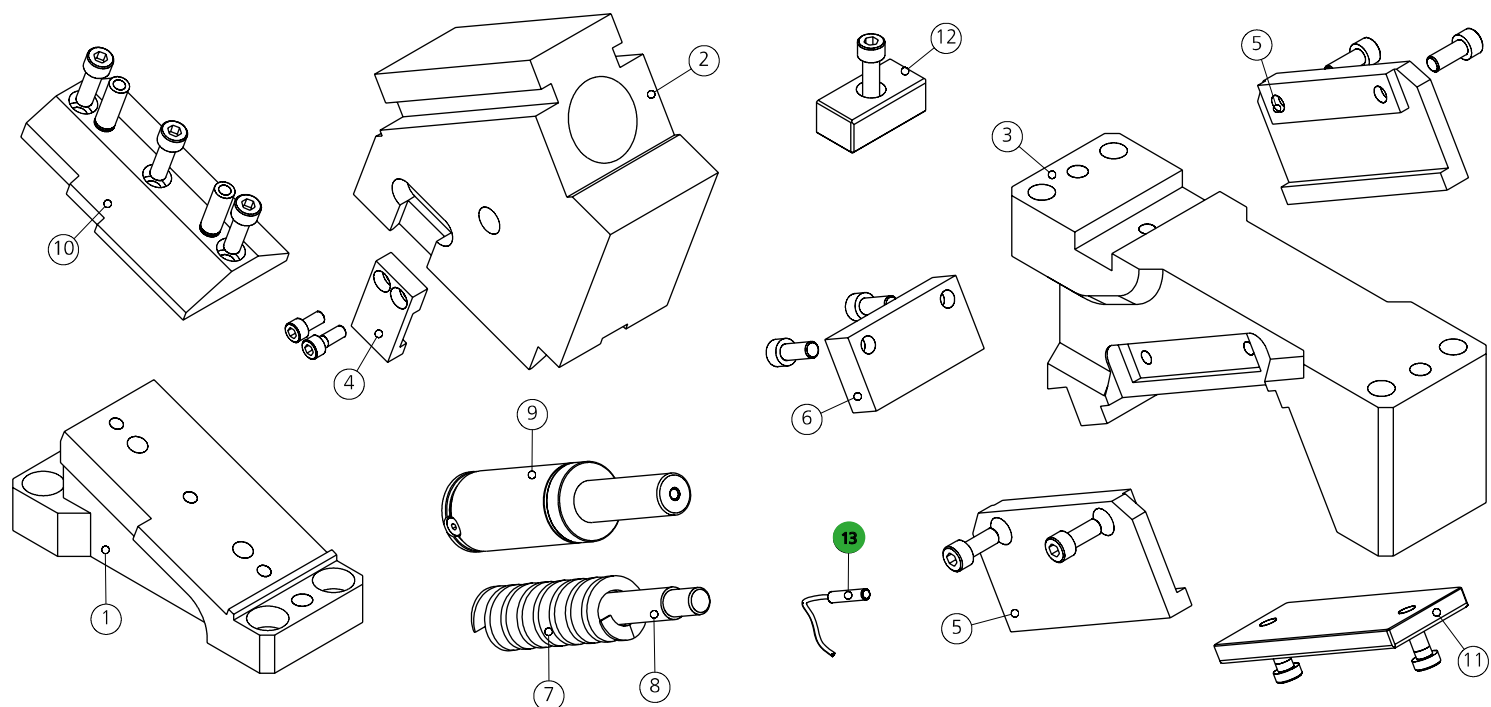


POS.	DESCRIPTION	Q.TY
001	CUNEO / WEDGE / DRUCKKEIL	1
002	SLITTA / SLIDER / LAGERKEIL	1
003	CORPO CAMMA / CAM BODY / GRUNDGEHÄUSE	1
004	STAFFA DI AGGANCIO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG	1
005	STAFFA / BRACKET / BRACKET	2
006	FINECORSA / LIMIT SWITCHES / ENDSCHALTER	1
007	MOLLA / COIL SPRING / FEDER	1*CHOOSE

POS.	DESCRIPTION	Q.TY
008	PERNO / PIN / STIFT	1*CHOOSE
009	CILINDRO AD AZOTO / NITROGEN CYLINDER / STICKSTOFFZYLINDER	1*CHOOSE
010**	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
011**	PIASTRA DI SCORRIMENTO / WEAR PLATE / DRUCKPLATTE	1
012	CHIAVETTA / KEY / SCHLÜSSEL	1
013	SENSORE DI SICUREZZA / SECURITY SENSOR / SENSOR FÜR SICHERHEIT	1*OPTION

** Le piastre di scorrimento 010 e 011 sono presenti nelle camme 0155.075*. Nelle camme 0155.072* il cuneo 001 e il corpo 003 sono integrali.

** Wear plates 010 and 011 are included in cam units 0155.075*. In cam units 0155.072* wedge 001 and cam body 003 are integral.

**In der Nocken 0155.075* sind die Gleitplatten 010 und 011 vorhanden. Der Druckkeil 001 und das Grundgehäuse 003 sind Einzelstück in den Nocken 0155.072*.



β	α	PRESS STROKE	SPRING STROKE	CAM STROKE	EXTRACTION FORCE (DAN)			CUTTING FORCE (DAN)	
					COIL SPRING	GAS SPRING 0155.072*	GAS SPRING 0155.075*	0155.072*	0155.075*
0°	50°	26.8	35	22.5	607	456	921	3680	10370
5°	50°	26.9	35	24.8	606	455	920	3680	10370
10°	50°	27.2	35	27.2	605	454	919	3680	10370
15°	50°	27.8	35	29.7	605	454	919	3680	10370
20°	50°	25.8	35	32.3	604	453	918	3680	10370
25°	50°	29.6	35	35	603	452	917	3680	10370
30°	50°	31	35	38	602	451	916	3680	10370
35°	50°	32.7	35	41.3	602	451	916	3680	10370
40°	50°	35	35	45	601	450	915	3680	10370
45°	50°	37.9	35	49.3	600	449	914	3680	10370
50°	50°	41.7	35	54.5	599	448	913	3680	10370
55°	55°	61.4	43	75	395	481	974	3680	10370
60°	60°	65.8	38	76	719	518	1037	3680	10370
65°	65°	68.8	32	75.7	748	596	1203	3680	10370
70°	70°	71.4	29	76	851	661	1373	3680	10370
75°	75°	70.9	19	73.4	970	804	1622	3680	10370
80°	80°	73.7	13	74.9	1170	1018	2039	3680	10370



CAM COD.	CUTTING FORCE	COIL/GAS SPRING	ANGLE	OPTIONAL SIZE SC	OPTIONAL SIZE WC
0155.07	2=3680 DAN	1= COIL SPRING	-00= ANGLE (FROM 0° TO 80°)	-SC** (FROM 0MM TO 60MM)	WC90 (WIDTH EXTENDED 90MM)
		3= GAS SPRING			
	5= GAS SPRING NOT FILLED				
	7= WITHOUT COIL/GAS SPRING				
	5=10370 DAN				

79