



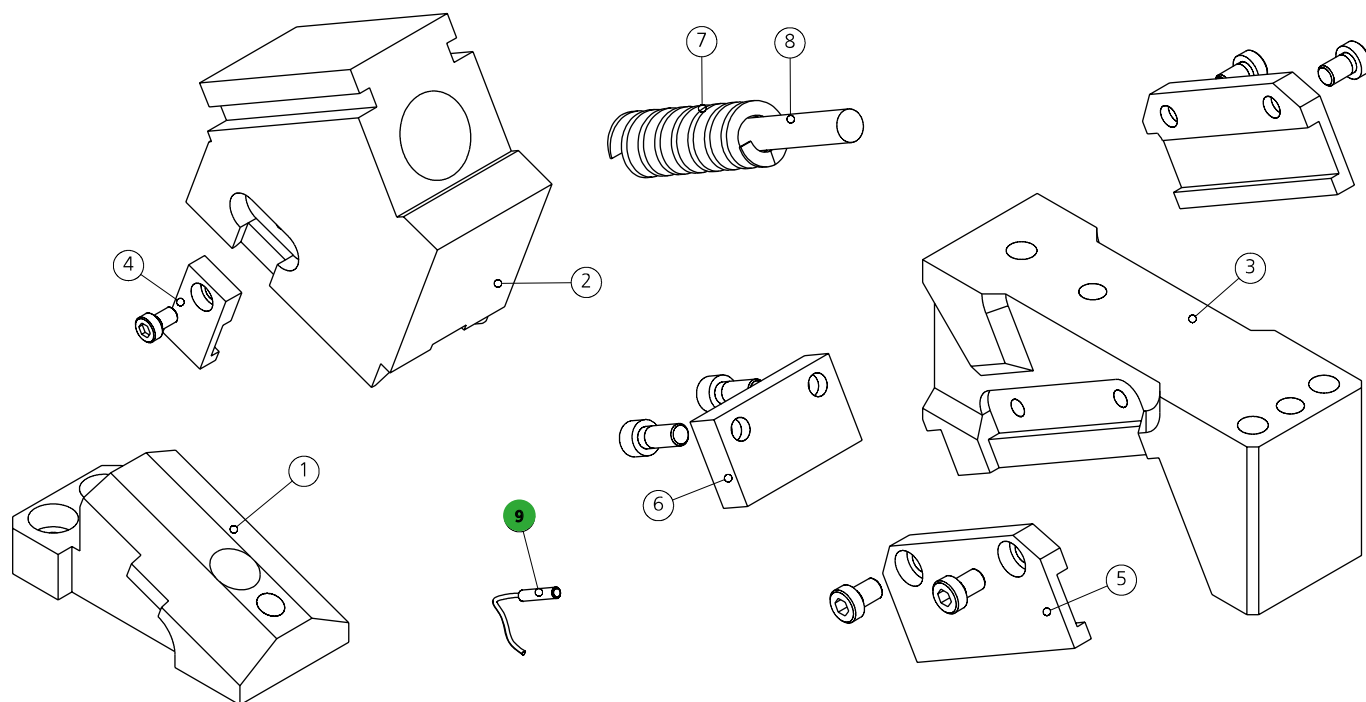


POS.	DESCRIPTION	Q.TY
001	CUNEO / WEDGE / DRUCKKEIL	1
002	SLITTA / SLIDER / LAGERKEIL	1
003	CORPO CAMMA / CAM BODY / GRUNDGEHÄUSE	1
004	STAFFA DI AGGANCIO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG	1
005	STAFFA / BRACKET / BRACKET	2

POS.	DESCRIPTION	Q.TY
006	FINECORSO / LIMIT SWITCHES / ENDSCHALTER	1
007	MOLLA / SPRING / FEDER	1
008	PERNO / PIN / STIFT	1
009	SENSORE DI SICUREZZA / SECURITY SENSOR / SENSOR FÜR SICHERHEIT	1*OPTION



β	α	PRESS STROKE	SPRING STROKE	CAM STROKE	EXTRACTION FORCE (DAN)	CUTTING FORCE (DAN)
0°	50°	24.5	32	20.6	275	2790
5°	50°	22.3	29	20.6	275	2790
10°	50°	21	27	21	275	2790
15°	50°	19.8	25	21.2	245	2790
20°	50°	19.6	24	22.1	245	2790
25°	50°	19.4	23	23	245	2790
30°	50°	20.3	23	25	244	2790
35°	50°	21.5	23	27.1	244	2790
40°	50°	23	23	29.6	243	2790
45°	50°	24.9	23	32.4	243	2790
50°	50°	27.4	23	35.8	243	2790
55°	55°	37.1	26	45.3	271	2790
60°	60°	39.8	23	46	292	2790
65°	65°	42.9	20	47.3	330	2790
70°	70°	46.7	17	49.7	378	2790
75°	75°	48.5	13	50.2	454	2790
80°	80°	56.7	10	57.6	557	2790

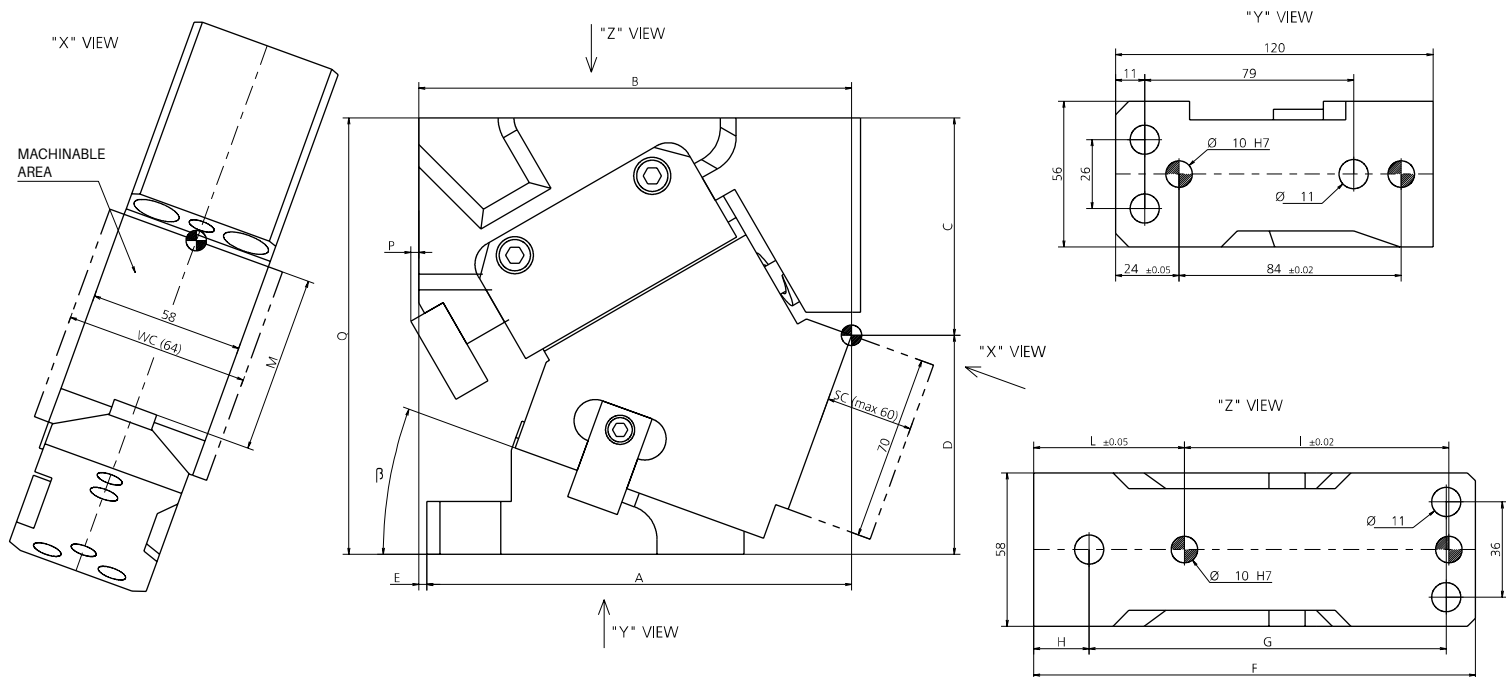

CODE	β	A	B	C	D	E	F	G	H	I	L	M	P	Q
0155.0511-00	0°	135	162	64	101	27	164	140	13	107	47	67	1.5	165
0155.0511-05	5°	141.75	163.75	68.74	96.26	22	168	140	17	107	51	67	2.1	165
0155.0511-10	10°	148.26	165.26	73.36	91.64	17	169	140	18	107	52	67	2	165
0155.0511-15	15°	154.54	163.54	77.84	87.16	9	166	135	20	100	56	67	3.7	165
0155.0511-20	20°	160.62	163.62	82.16	82.84	3	167	135	21	100	57	67	2.9	165
0155.0511-25	25°	165.51	161.51	86.31	78.69	-4	167	130	26	95	62	67	3.1	165
0155.0511-30	30°	170.21	159.21	90.26	74.74	-11	167	130	26	95	62	67	3	165
0155.0511-35	35°	173.76	154.76	94	71	-19	165	130	24	95	60	67	3.8	165
0155.0511-40	40°	178.16	148.16	98.53	66.47	-30	157	125	21	85	62	67	5.6	165
0155.0511-45	45°	182.44	142.44	103.82	61.18	-40	157	125	21	85	62	67	5.3	165
0155.0511-50	50°	185.61	133.61	109.87	55.13	-52	153	125	17	80	63	67	7	165
0155.0511-55	55°	194.29	145.29	117.22	62.78	-49	163	125	27	80	73	82	6	180
0155.0511-60	60°	204.74	142.74	119.87	65.13	-62	163	125	27	80	73	85	6	185
0155.0511-65	65°	211.09	137.09	123.64	66.36	-74	163	125	27	80	73	83	6	190
0155.0511-70	70°	218.7	133.7	125.7	64.3	-85	163	125	27	80	73	78	6	190
0155.0511-75	75°	229.42	132.42	128.92	61.08	-97	163	125	27	80	73	80	6	190
0155.0511-80	80°	236.42	128.42	131.63	58.37	-108	163	125	27	80	73	80	6	190

9 PATENT PENDING

9 (9003) SENSORE / SENSOR / SENSOR



MODELLO D'ORDINE / ORDER EXAMPLE / BESTELLBEISPIEL / MODÈLE DE COMMANDE

MODEL **0155.0511** INCLINATION **-20°** OPTION **SC30 (Max 60mm)** OPTION CODE **9003.0002**