

# 0148.1165 - CAM SMEG1160-25

FORZA INIZIALE DI ESTRAZIONE / INITIAL EXTRACTION FORCE **1160 daN**

RÜCKZUGSKRAFT / FORCE INITIALE D'EXTRACTION

FORZA FINALE DI ESTRAZIONE / FINAL FORCE OF EXTRACTION **2550 daN**


ENDKRAFT DER EXTRACTION / FORCE FINALE D'EXTRACTION

SFORZO MAX TRANCIO **9000 daN**

CUTTING MAX FORCE

MAXIMALE SCHNITTKRAFT


EFFORT MAXI DÉCOUPE

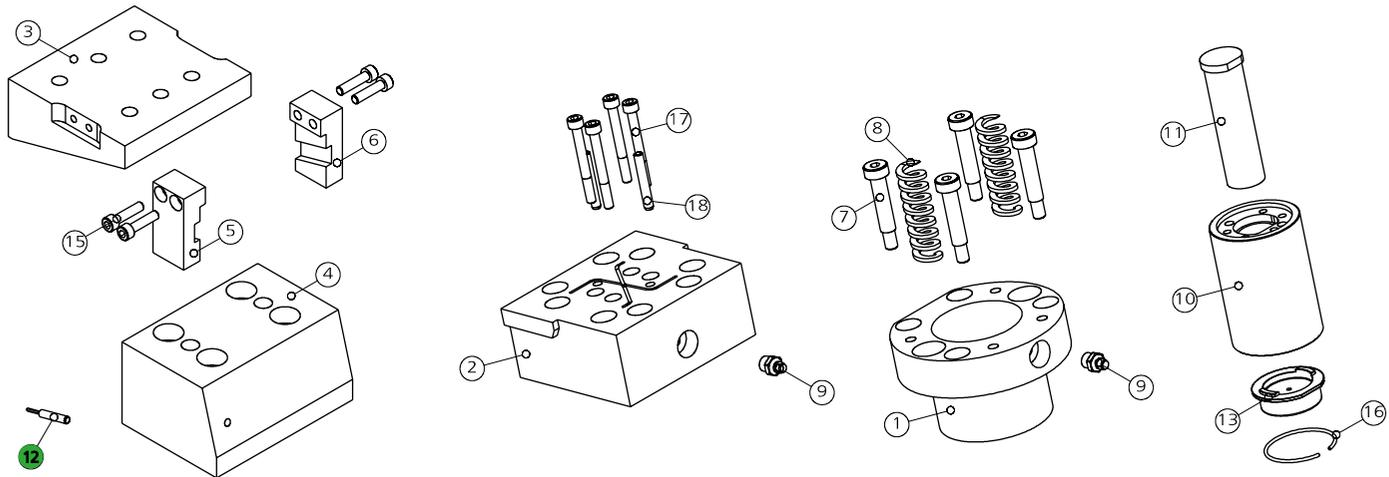

POS.	CODE	DESCRIPTION	Q.TY
001	<b>8013.0690.1150.600.001</b>	BOCCOLA DI GUIDA / GUIDE BUSHINGS / FÜHRUNGSBÜCHSE	1
002	<b>8014.0048.1160</b>	PORTA PUNZONE / PUNCHES HOLDER / TRÄGERPLATTE	1
003	<b>8116.4851.1106.05.001</b>	INCUDINE / ANVIL / TREIBER 5°	1*CHOOSE
003	<b>8116.4851.1106.10.001</b>	INCUDINE / ANVIL / TREIBER 10°	1*CHOOSE
003	<b>8116.4851.1106.15.001</b>	INCUDINE / ANVIL / TREIBER 15°	1*CHOOSE
003	<b>8116.4851.1106.20.001</b>	INCUDINE / ANVIL / TREIBER 20°	1*CHOOSE
003	<b>8116.4851.1106.25.001</b>	INCUDINE / ANVIL / TREIBER 25°	1*CHOOSE
003	<b>8116.4851.1106.30.001</b>	INCUDINE / ANVIL / TREIBER 30°	1*CHOOSE
003	<b>8116.4851.1106.35.001</b>	INCUDINE / ANVIL / TREIBER 35°	1*CHOOSE
003	<b>8116.4851.1106.40.001</b>	INCUDINE / ANVIL / TREIBER 40°	1*CHOOSE
003	<b>8116.4851.1106.45.001</b>	INCUDINE / ANVIL / TREIBER 45°	1*CHOOSE
003	<b>8116.4851.1106.50.001</b>	INCUDINE / ANVIL / TREIBER 50°	1*CHOOSE
004	<b>8117.4851.1106.05.001</b>	GUIDA / GUIDE / FÜHRUNG 5°	1*CHOOSE
004	<b>8117.4851.1106.10.001</b>	GUIDA / GUIDE / FÜHRUNG 10°	1*CHOOSE
004	<b>8117.4851.1106.15.001</b>	GUIDA / GUIDE / FÜHRUNG 15°	1*CHOOSE
004	<b>8117.4851.1106.20.001</b>	GUIDA / GUIDE / FÜHRUNG 20°	1*CHOOSE
004	<b>8117.4851.1106.25.001</b>	GUIDA / GUIDE / FÜHRUNG 25°	1*CHOOSE
004	<b>8117.4851.1106.30.001</b>	GUIDA / GUIDE / FÜHRUNG 30°	1*CHOOSE
004	<b>8117.4851.1106.35.001</b>	GUIDA / GUIDE / FÜHRUNG 35°	1*CHOOSE
004	<b>8117.4851.1106.40.001</b>	GUIDA / GUIDE / FÜHRUNG 40°	1*CHOOSE
004	<b>8117.4851.1106.45.001</b>	GUIDA / GUIDE / FÜHRUNG 45°	1*CHOOSE
004	<b>8117.4851.1106.50.001</b>	GUIDA / GUIDE / FÜHRUNG 50°	1*CHOOSE
005	<b>8115.4851.1106.05.001</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 5°	1*CHOOSE
005	<b>8115.4851.1106.10.001</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 10°	1*CHOOSE
005	<b>8115.4851.1106.15.001</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 15°	1*CHOOSE
005	<b>8115.4851.1106.20.001</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 20°	1*CHOOSE
005	<b>8115.4851.1106.25.001</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 25°	1*CHOOSE
005	<b>8115.4851.1106.30.001</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 30°	1*CHOOSE
005	<b>8115.4851.1106.35.001</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 35°	1*CHOOSE
005	<b>8115.4851.1106.40.001</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 40°	1*CHOOSE
005	<b>8115.4851.1106.45.001</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 45°	1*CHOOSE
005	<b>8115.4851.1106.50.001</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 50°	1*CHOOSE
006	<b>8115.4851.1106.05.002</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 5°	1*CHOOSE
006	<b>8115.4851.1106.10.002</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 10°	1*CHOOSE
006	<b>8115.4851.1106.15.002</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 15°	1*CHOOSE

POS.	CODE	DESCRIPTION	Q.TY
006	<b>8115.4851.1106.20.002</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 20°	1*CHOOSE
006	<b>8115.4851.1106.25.002</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 25°	1*CHOOSE
006	<b>8115.4851.1106.30.002</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 30°	1*CHOOSE
006	<b>8115.4851.1106.35.002</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 35°	1*CHOOSE
006	<b>8115.4851.1106.40.002</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 40°	1*CHOOSE
006	<b>8115.4851.1106.45.002</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 45°	1*CHOOSE
006	<b>8115.4851.1106.50.002</b>	STAFFA DI AGGANCIAMENTO / BRACKET ATTACHMENTS / BRACKETBEFESTIGUNG 50°	1*CHOOSE
007	<b>9008.0810.040</b>	VITE A COLLETTO / SHOULDER SCREW / ANSATZSCHRAUBE	4
008	<b>9009.3000.0890.200</b>	MOLLA / SPRING / FEDER	2
009	<b>9006.002</b>	INGRASSATORE / NIPPLES / SCHMIERUNG	2
010	<b>9030.025.001</b>	CILINDRO SPECIALE / SPECIAL CYLINDER / SPEZIALZYLINDER	1
011	<b>9090.3JBM2.250.090</b>	PUNZONE SBOZZATO TC CON ESPULSORE / BLANK-HEADED PUNCH WITH EJECTOR / ROHLING SCHNEIDSTEMPEL MIT ABSTOSSER 10 90	1*OPTION
011	<b>9090.3JBM2.250.100</b>	PUNZONE SBOZZATO TC CON ESPULSORE / BLANK-HEADED PUNCH WITH EJECTOR / ROHLING SCHNEIDSTEMPEL MIT ABSTOSSER 10 100	1*OPTION
011	<b>093J_M2.250.090</b>	PUNZONE TC CON ESPULSORE / HEADED PUNCH WITH EJECTOR / SCHNEIDSTEMPEL MIT ABSTOSSER 10 90	1*OPTION
011	<b>093J_M2.250.100</b>	PUNZONE TC CON ESPULSORE / HEADED PUNCH WITH EJECTOR / SCHNEIDSTEMPEL MIT ABSTOSSER 10 100	1*OPTION
012	<b>9003.0001</b>	SENSORE DI SICUREZZA / SECURITY SENSOR / SENSOR FÜR SICHERHEIT	1*OPTION
013	<b>9016.090.205.001</b>	PREMILAMIERA CORTO / SHORT BLANKHOLDER / KURZ BLECHHALTER 90MM	1*CHOOSE
013	<b>9016.090.205.002</b>	PREMILAMIERA LUNGO / LONG BLANKHOLDER / LANG BLECHHALTER 90MM	1*CHOOSE
013	<b>9016.100.205.001</b>	PREMILAMIERA CORTO / SHORT BLANKHOLDER / KURZ BLECHHALTER 100MM	1*CHOOSE
013	<b>9016.100.205.002</b>	PREMILAMIERA LUNGO / LONG BLANKHOLDER / LANG BLECHHALTER 100MM	1*CHOOSE
013	<b>8016.090.205.001</b>	PREMILAMIERA CORTO / SHORT BLANKHOLDER / KURZ BLECHHALTER 90MM	1*OPTION
013	<b>8016.090.205.002</b>	PREMILAMIERA LUNGO / LONG BLANKHOLDER / LANG BLECHHALTER 90MM	1*OPTION
013	<b>8016.100.205.001</b>	PREMILAMIERA CORTO / SHORT BLANKHOLDER / KURZ BLECHHALTER 100MM	1*OPTION
013	<b>8016.100.205.002</b>	PREMILAMIERA LUNGO / LONG BLANKHOLDER / LANG BLECHHALTER 100MM	1*OPTION
015	<b>9007.06.020.129.1.4762</b>	VITE / SCREW / SCHRAUBE M6X20	4
016	<b>9004.2480.001</b>	SEEGER / SEEGER / SEEGERRING	1
017	<b>9007.06.055.129.1.4762</b>	VITE / SCREW / SCHRAUBE M6X55	4
018	<b>9028.06.020.8735</b>	SPINA CILINDRICA / DOWEL PIN / ZYLINDERSTIFT D6X20	2


FORZA INIZIALE DI ESTRAZIONE / INITIAL EXTRACTION FORCE **1160 daN** SFORZO MAX TRANCIO **9000 daN**  
 RÜCKZUGSKRAFT / FORCE INITIALE D'EXTRACTION  
 FORZA FINALE DI ESTRAZIONE / FINAL FORCE OF EXTRACTION **2550 daN** CUTTING MAX FORCE  
 ENDKRAFT DER EXTRAKTION / FORCE FINALE D'EXTRACTION MAXIMALE SCHNITTKRAFT  
 EFFORT MAXI DÉCOUPE

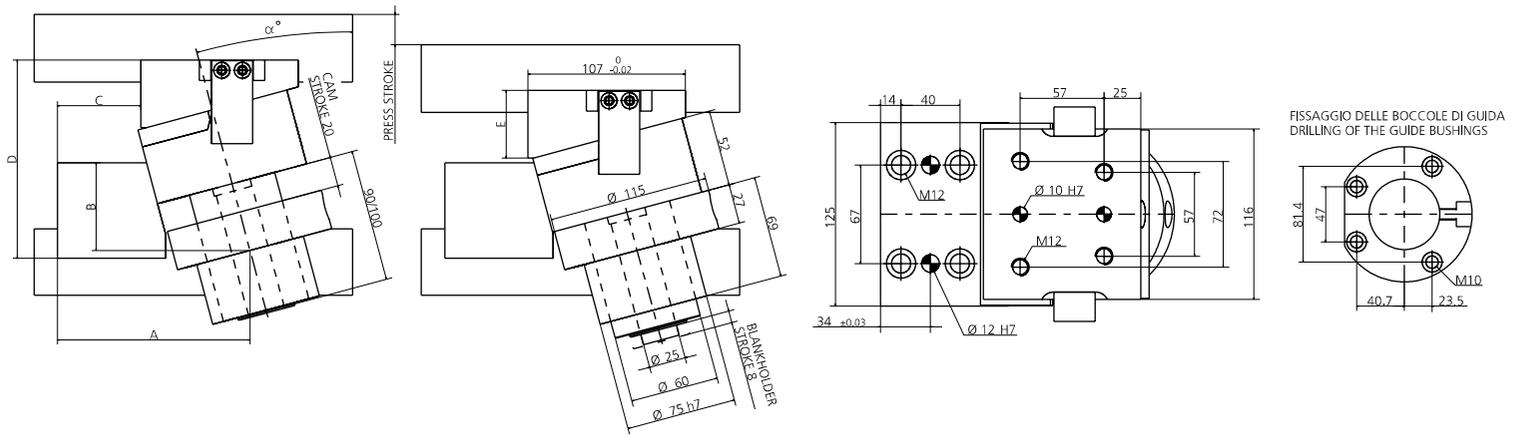


$\alpha^\circ$	PRESS STROKE	A	B	C	D	E
5°	20.1	141.7	71.6	83.45	123.4	35
10°	20.3	143.3	65.6	77	125.5	35
15°	20.7	144.23	56.6	70	135	46
20°	21.3	144.6	53.6	63.85	144.65	54
25°	22.05	144.15	47.1	55.9	154.25	64
30°	23.1	143.75	36.9	48	159	67
35°	24.4	142.9	31.9	41.15	167.75	76
40°	26.1	139.85	24.9	32.6	179.25	86
45°	28.3	138.35	14.6	25	193	96
50°	31.1	134.25	8.6	16.9	207.05	108

\* PER INCLINAZIONI FUORI STANDARD RIVOLGERSI ALL'UFFICIO TECNICONESTARK / \* FOR NON-STANDARD INCLINATIONS, PLEASE CONTACT NEWSTARK TECHNICAL OFFICE.  
 / \* FÜR NICHT STANDARDMÄSSIGE NEIGUNGEN WENDEN SIE SICH BITTE AN DAS TECHNISCHE BÜRO VON NEWSTARK

0011 (9090) PUNZONE SBOZZATO / BLANK PUNCH / ROHLING SCHNEIDSTEMPEL ISO8020



013 (9016) PREMILAMIERA SBOZZATO / BLANK-BLANKHOLDER / ROHLING BLECHHALTER



011 (093J\_) PUNZONE SAGOMATO / SHAPED PUNCH / GEFORMT SCHNEIDSTEMPEL ISO8020




013 (8016) PREMILAMIERA SAGOMATO / SHAPED BLANKHOLDER / GEFORMT BLECHHALTER



012 (9003) SENSORE / SENSOR / SENSOR



12 PATENT PENDING

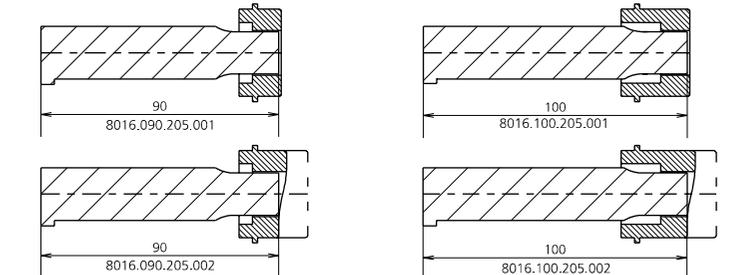

MODELLO D'ORDINE / ORDER EXAMPLE / BESTELLBEISPIEL / MODÈLE DE COMMANDE

MODEL **0148.1165** INCLINATION **+10°** BLANKHOLDER **9016/8016.** OPTION CODE **9003.0001**